


The **Batium** range controlled by **microprocessor** guarantees you the maximum effectiveness and security.



35 ▶ 225 Ah  
GEL/AGM/VRLA/LIQUIDE



Ref. **024519**

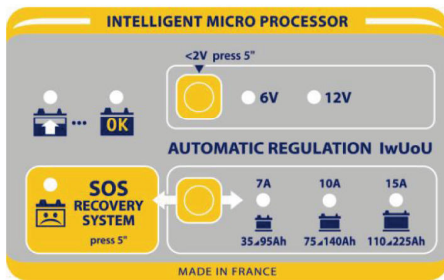

The charge is **automatic/without supervision**.



50% shorter charge time compared to a traditional charger. Batium ensures an ultra-quick and safe charge, by providing a **constant average current** during "boost" phase.



Batium ensures a **100% charge** of all lead-acid batteries\* (IwUoU curve). A standard "automatic" charger, W2 or WU curve, charges up to 90% only.



Batium is a microprocessor controlled **smart charger**, that constantly analyses the state of the battery and regulates the charge according to the battery's needs.



**Deeply discharged batteries** that are still in a good state of health (eg : Lights on when the vehicle is stopped) could have a voltage as low as 1V. Batium can **charge from 1 volt**, whereas most chargers cannot.




**Protection of the on-board electronics.** No need to disconnect the battery from the vehicle. No risk of sparks or short-circuits, and no current is supplied to the clamps unless they are connected to the battery terminals.



Batium features a function for batteries that have started a **sulphatation process**, and cannot be recharged with a normal charge. The Batium's **SOS RECOVERY** delivers a specific cycle of **regeneration charge**.

IwUoU



CE EN 60335-2-29

50/60Hz	225W	6-12V	Reg	EFFICACE /RMS	MOYEN/AVERAGE			FUSE	30,5x20x13 cm	5,7 kg	SOS RECOVERY
					Reg 1	Reg 2	Reg 3				
230V	225W	6-12V	3	22A	7	10	15	15A	30,5x20x13 cm	5,7 kg	•