


Green'up Access ready to install kit for electric vehicle charging



Green'up Access sockets 25 kWh / 8h / 230V - for electric vehicles




GREEN'UP SYSTEM
The Green'up system is based on an innovative Legrand technology, activating "maximum power" mode and ensuring a secure and fast charging process

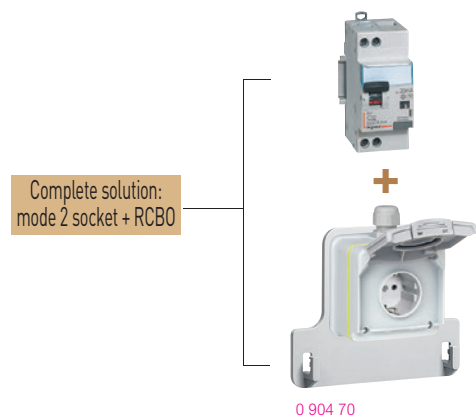





Ready to install kit

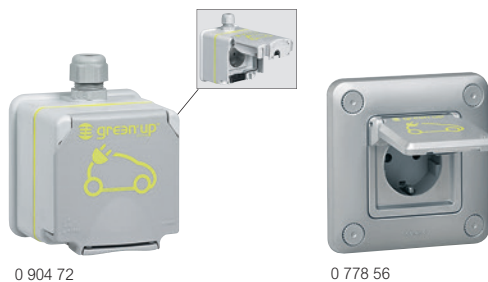Pack	Cat.Nos	Ready to install kit
1	0 904 70	<p>Allows creating a safe infrastructure for electric and hybrid vehicle charging, using mode 2 (or mode 1) charging cables. Suitable for residential and workplace use</p> <p>Power supply directly from the electrical panel: 1 dedicated line 3 x 2.5 mm² cable, protected with one RCBO (one line per socket)</p> <p>The kit contains:</p> <ul style="list-style-type: none"> - 1 heavy duty German standard Green'up Access plastic socket, with flap cover, IP 55 - IK 08 - 25 kW/h - 230 V - 8h, 6 mm² screw terminals, according to IEC 60884-1, NF C 61-314, VDE 620-1 - 1 base for hanging up the vehicle charging cable control box - 1 RCBO 20 A, C curve, 30 mA, Hpi type Cat.No 4 107 54 <p>The use of a surge protective device (p. 68) is recommended</p> <p>Recommended installation height; between 0.80 and 1.20 m from the floor</p>



Used for safely charging rechargeable electric and hybrid vehicles which take mode 2 cord (compatible with mode 1)
Connected to the consumer panel via one 3 x 2.5 mm² dedicated line (1 line per socket) protected by 30 mA - 20 A C curve, type A or HPI RCBO (or 30 mA type A or HPI RCCB + 20 A C curve circuit breaker)
Recommended installation height: 1.30 m from the floor
Suitable for residential and workplace use

Mode 1 and mode 2 sockets - 3.2 kVA

Pack	Cat.Nos	Mode 1 and mode 2 sockets - 3.2 kVA
1	0 904 72	<p>Heavy-duty mechanisms with silvered contacts Single-phase sockets - screw connection - 230 V Supplied with base Cat.No 0 904 78 for hanging up the vehicle charging cable control box For charging 1 vehicle Conform to IEC 60-884-1</p> <p>IP 55 - IK 08 surface-mounting Suitable for installation in private houses Plastic socket with flap cover Supplied complete with surface mounting box fitted with an ISO 20 cable gland Dimensions (H x W x D): 98 x 98 x 70 mm (exc. cable gland)</p> <p> German standard socket outlet  British standard socket outlet</p>
1	0 904 73	
1	0 778 56	<p>IP 55 - IK 10 flush-mounting - metal socket Suitable for installation in private houses, lock-up garages, parking lots, etc Supplied complete with plate and support Mounting in 1-gang Batibox flush-mounting box depth 50 mm Can be surface mounted with box Cat.No 0 778 90 Dimensions (H x W x D): 110 x 110 x 13.5 mm  German standard socket outlet</p>
1	0 778 57	<p>IP 55 - IK 10 flush-mounting - metal socket with locked flap cover Suitable for installation in private houses, lock-up garages, parking lots, etc Supplied complete with plate and support Mounting in 1-gang Batibox flush-mounting box depth 50 mm Can be surface mounted with box Cat.No 0 778 90 Dimensions (H x W x D): 110 x 110 x 13.5 mm Supplied complete with a unique set of 2 keys in order to restrict access to the socket  German standard socket outlet</p>