


Traditional charger for liquid electrolyte lead battery recharge. MULTICHARGE CT 48 can recharge several 12 V batteries at a same time. Robust it can adapt to different demanding environments and especially to workshops.

BEST FOR SIMULTANEOUS RECHARGE OF BATTERIES

- For liquid electrolyte lead-acid batteries :
 - 12V : from 90 to 460 Ah
 - 24V : from 90 to 460 Ah
 - 36 V :from 90 to 460 Ah
 - 48 V : from 70 to 360 Ah
- State of charge viewing with **ammeter** and voltage output viewing with **voltmeter**.
- 24 different adjustments in order to enhance charging :
 - **4 voltage output** : 12 - 24 - 36 - 48 V
 - **6 charging speeds** across two modes : one «normal» charging and one «boost» charging.
- Multicharge CT 48 V is designed to charge common electrolyte lead-acid batteries. Unsuitable for Lithium Batteries.



CHARGING CURVE W (must have supervision)

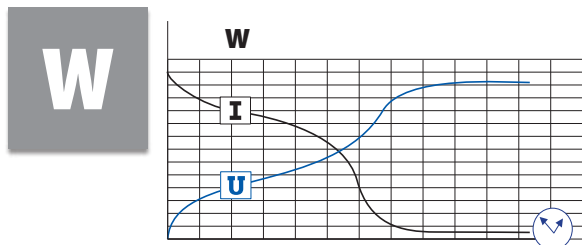

Fuse x10
40A - Ref.054554

EFFECTIVE PROTECTION



- Thermal protection of the transformer
- Protection against polarity reversal with 2 automotive fuses
- Individual charge clamps to avoid any sparks
- Metal case

50-60hz	1200 W	12 V	6	Reg	Moyen/Average (EN 60335)						cm	kg
					P1	P2	P3	P4	P5	P6		
230 V	1200 W	12 V	6		20 A	24 A	25 A	28 A	29 A	32 A	190 x 390 x 260	14,7
		24 V	6		20 A	22 A	24 A	26 A	29 A	32 A		
		36 V	6		19 A	22 A	24 A	26 A	28 A	30 A		
		48 V	6		15 A	17 A	18 A	20 A	22 A	24 A		