



HAIDI

LITHIUM IRON PHOSPHATE BATTERY

FEATURES Lithium Iron Phosphate (LiFePO4): the Safest Lithium Technology.
 Integrated Battery Management System(BMS).
 Bluetooth/RS485/RS232/SMBus/CANBus (Optional).
 SOC LED/LCD Indicator(Optional).

PERFORMANCE Long Cycle Life > 2000cycles @ 100% DOD.
 High Density, High Discharge Current, High Temperature Range.
 Low Weight, Free Maintenance.
 Fast Charging.
 Environment Friendly.



HD12.8-12(12.8V12Ah)

BATTERY DATA SHEET

Electrical Parameters

Nominal Voltage	12.8V
Rated Capacity	12Ah
Energy	153.6Wh
Resistance	≤30m Ω
Efficiency	99%
Cycle Life	>2000cycles @1C,100% DOD
Self Discharge	2% per Month
Max. Modules in Series/Parallel	4S/20P

Mechanical Parameters

Dimension(L x W x H)	152x 99x 96 mm 5.98 x 3.89 x 3.78"
Weight	1.7kg(3.75lbs)
Terminal Type	T2
Battery Housing	ABS, UL-94 V-0
Housing Protection	IP56
Cell Type-Chemistry	LiFePO4 Cylindrical Cell
SOC Display(Optional)	LED/LCD Indicator

Discharge Parameters

Continuous Discharge Current	10A
Pulse Discharge Current	15A(>3 seconds)
Recommended Volt. Disconnect	10V
BMS Discharge Cut-off Voltage	8V
Reconnect Voltage	9.2V
Short Circuit Protection	200~600 us

Charge Parameters

Charge Method	CC-CV
Charge Voltage	14.4~14.8V
Recommended Float Voltage	13.8V
Recommended Charge Current	6A
Maximum Charge Current	12A
BMS Charge Cut-off Voltage	15.6V

Compliance Certificate

Certifications	UL1642(cecl)
	CE
	IEC62133 & CB
	KC
	BIS
Shipping Classification	UN3480, Class 9, UN38.3

Temperature Parameters

Discharge Temperature	-30 to 60°C (-22 to 140°F)
Charge Temperature	0 to 45°C (32 to 113°F)
Storage Temperature	-40 to 60°C(-40 to 140°F)
BMS High Temperature Cut-off	80°C(176°F)







HAIDI

Performance Characteristics


CYCLE LIFE vs. DEPTH OF DISCHARGE(DOD) DISCHARGE@0.1C, 25 C

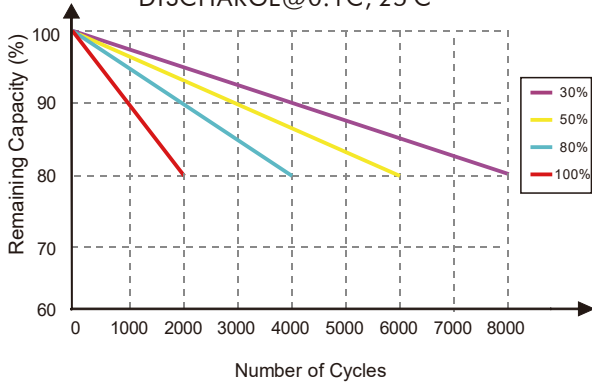


DISCHARGE CAPACITY at VARIOUS TEMPERATURES DISCHARGE @1C

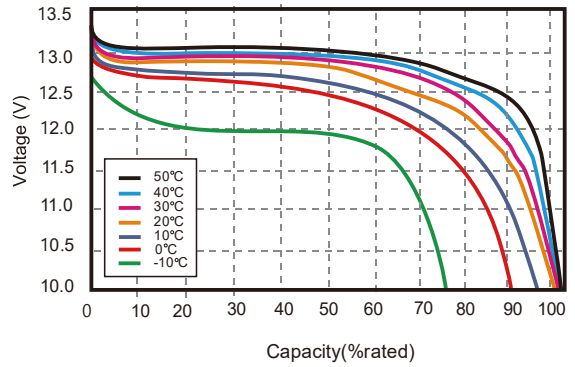


STATE OF CHARGE CURVE @0.5C, 25 C

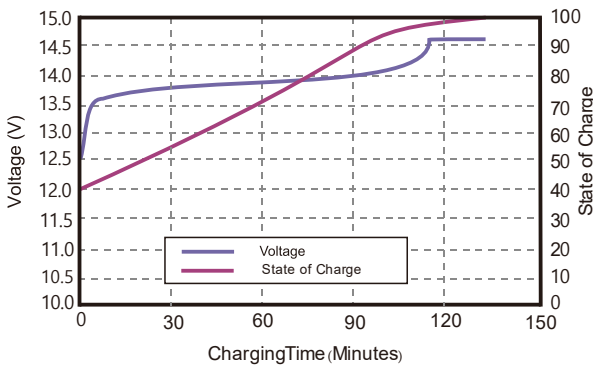

CHARGING CHARACTERISTICS @0.5C, 25°C

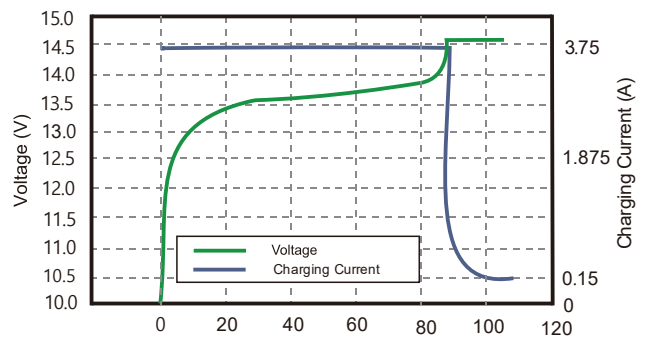

Battery Dimension

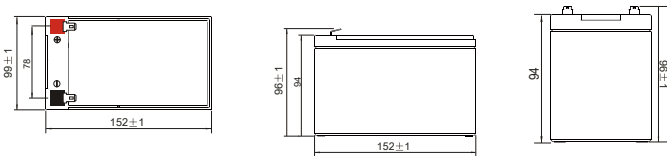

T2
Terminal



Battery Recycle



Battery Applications

- + Data Center UPS
- + Telecom Backup Power
- + Military Power Supply
- + Solar Energy Storage System
- + Solar Street LED Lightings
- + Autonomously Guided Vehicles (AGVs)
- + Industrial Robotics & Handling Equipment
- + Aerial Work Platform
- + Floor Cleaning Machines
- + Power Tools, Lawn Mower
- + Electric Bike & Motorcycles
- + Electric Mobilities(E-scooters, Wheelchair)
- + Golf Trolley & Golf Carts
- + Medical Devices
- + Electric Ships
- + Passenger Vehicles

NOTE: Do Not Mix With Sealed Lead Acid Batteries When Recycling.

See Haidi User's Manual for Proper Operation.

© 2011, Haidi Energy Technology Co., Ltd. All Rights Reserved.